

SECURAIL LADDER FITTED WITH FOLD AWAY RUNGS

ÉCHELLE SECURAIL ÉQUIPÉE D'ÉCHELONS REPLIABLES

SECURAIL LEITER MIT AUSKLAPPBAREN STUFEN

ESCALERA SECURAIL EQUIPADA CON PELDAÑOS ABATIBLES

Code N° RHF030

October 2015

DESCRIPTION

The Fallprotec rail system is designed to be permanently installed on pylons, buildings, shafts or sewers where maintenance workers are exposed to a risk of falling when performing their work. The Fallprotec rail system is designed to protect one maintenance worker attached on the rail. The fold away rungs SecuRail Ladder is an aesthetic solution integrated to the facade with it's small footprint. When it is in service, the ladder is deployed by the rescue team or the maintenance team to access the building from the ground or from a lower terrace to the area that requires rapid intervention. The operation involves removing the cover and then rotates the rungs as the user is climbing the ladder. The user is attached to the rail arrester VIA4 which works as a fall arrester. The ladder consists of modules of 3 m height, assembled to achieve the desired height. The cover is clipped on the ladder; it is removed by pushing it up and releasing it to the outside. The ladder is fixed to the building structure by fixing brackets regularly spaced over the entire height. It comes with accessories like extensions for roof access.

TECHNICAL SPECIFICATION

Comes with an installer and user manual.
Material: Aluminium alloyed and AISI304



Compliant with EN353-1:2002
MADE IN EU



Test Certificate n° CE0082



CE conformity number
0082/1084/160/11/0310




Fig.1. Assembly of the union

TEC0041-UK-SecuRail Ladder fitted with foldable rungs

| Code N° | Weight | Description | Availability |
|---------|--------|---|----------------------|
| RHF030 | 2,6 Kg | 3 m for module | Available from stock |
| RHF051 | 1,5 Kg | Outer curve for ladder exit alu 6060T6 anodised, one bending 90°, radius 350mm 2x250mm straight ends included | Available from stock |
| RHF025 | 6,6 Kg | Extension for roof access alu 6060T6 | Available from stock |
| RHF049 | 10 Kg | Extension for roof access for SecuRail Ladder alu 6060T6 | Available from stock |
| RHF031 | 1,6 Kg | Cover to hidden the ladder "U" natural | Available from stock |
| RHF014 | 0,8 Kg | Trolley VIA4 with the shock absorber and carabiner for vertical configuration alu + SS304 + bearing | Available from stock |



The worker needs to be equipped with a full body harness according to standard EN361 having a chest and back anchor point.

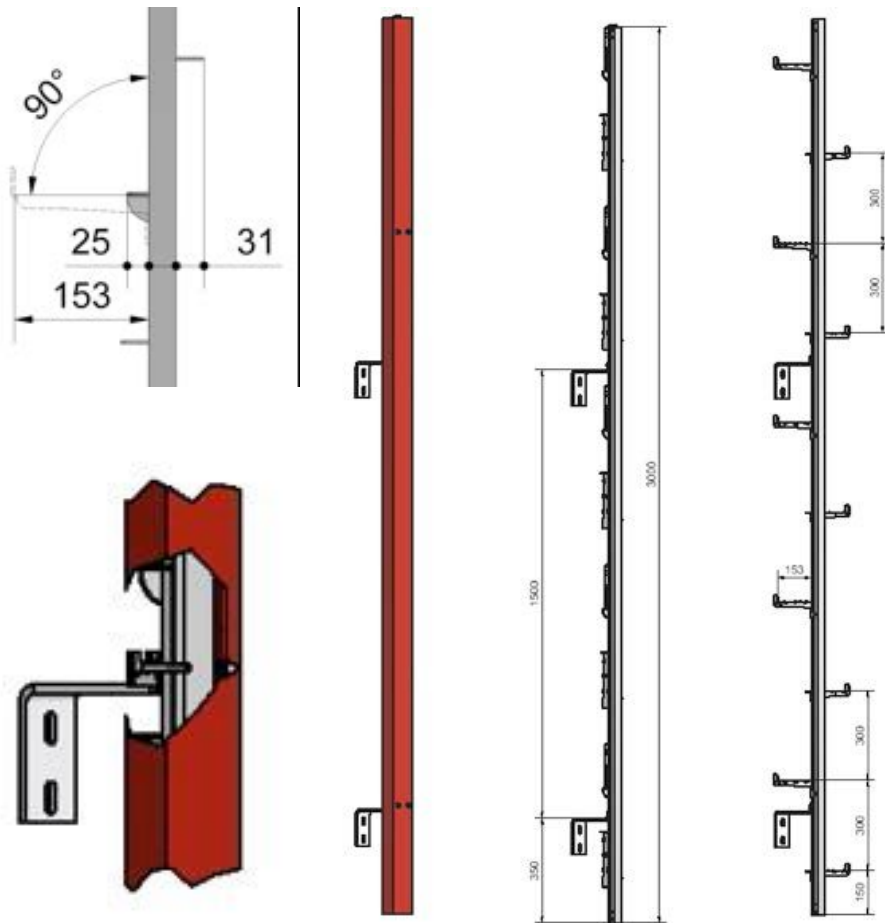

RHF030 out of/in service

TEC0041-UK-SecuRail Ladder fitted with foldable rungs



RHF030: aesthetic solution integrated to the façade



RHF025 Extension for roof access alu 6060T6



Worker operating on the ladder

TEC0041-UK-SecuRail Ladder fitted with foldable rungs